


## PRODUCT DATA SHEET

### Stepmaster 100 Series Stairnosings


Model No. SMN112

#### Specifications

<b>Base Material</b>	Alloy: 6060, Temper: T5
<b>Finish</b>	Clear Anodised – 25Um
<b>Tread Width</b>	68mm
<b>Front Depth</b>	10mm
<b>Tread Thickness</b>	4.8mm
<b>Insert Type</b>	Solid Epoxy Based Carborundum – Heavy Duty, External Grade
<b>Insert Width</b>	54mm
<b>Insert Colours</b>	Black, Safety Yellow, Grey, Red, Luminescent – other colours on request.
<b>Insert Slip Rating</b>	P5 Classification (Highest available)
<b>Code Compliance</b>	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
<b>Features</b>	Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings
<b>Application</b>	Surface mounted on hard floor finishes – Concrete, Timber etc.
<b>Options</b>	Available in black anodised aluminium

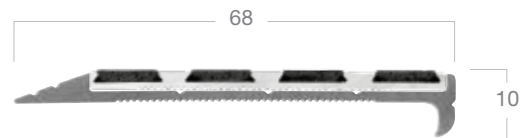


#### Standard Colours

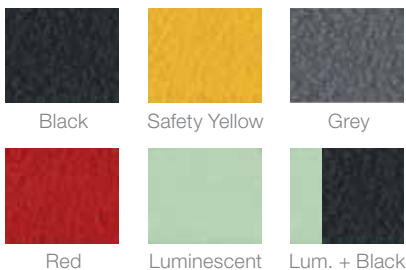

Other colours available on request

#### Typical Installation Method

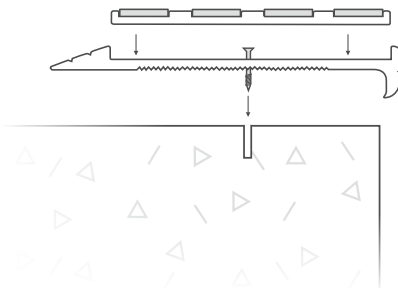

#### Stepmaster Stairnosings

##### “Defines the lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.