


PRODUCT DATA SHEET

Stepmaster 200 Series Stairnosings


Model No. SMN212

Specifications

| | |
|---------------------------|---|
| Base Material | Alloy: 6060, Temper: T5 |
| Finish | Clear Anodised – 25Um |
| Tread Width | 68mm |
| Front Depth | 10mm |
| Tread Thickness | 4.8mm |
| Insert Type | Solid Epoxy Based Carborundum – Heavy Duty, External Grade |
| Insert Width | 54mm |
| Insert Colours | Black, Safety Yellow, Grey, Red, Luminescent – other colours on request. |
| Insert Slip Rating | P5 Classification (Highest available) |
| Code Compliance | AS1428.1-2009 Check floor finish colour for luminance contrast requirements |
| Features | Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings |
| Application | Surface mounted on hard floor finishes – Concrete, Timber etc. |
| Options | Available in black anodised aluminium |

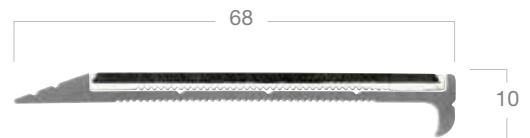


Standard Colours

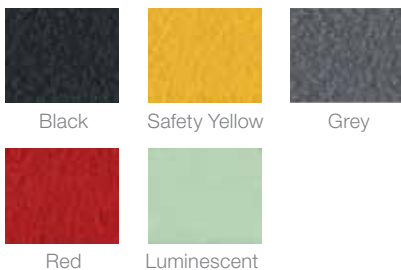

Other colours available on request

Typical Installation Method

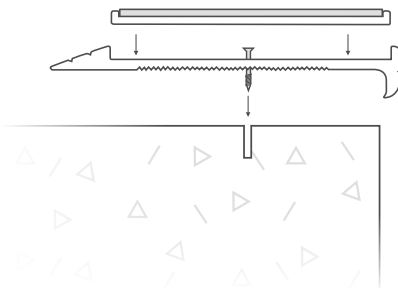

Stepmaster Stairnosings

“Defines the lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.