

## PRODUCT DATA SHEET

### Stepmaster 300 Series Stairnosings


Model No. SMN313

#### Specifications

|                           |   |
|---------------------------|---|
| <b>Base Material</b>      | Alloy: 6060, Temper: T5   |
| <b>Finish</b>             | Clear Anodised – 25Um   |
| <b>Tread Width</b>        | 58mm  |
| <b>Front Depth</b>        | 10mm  |
| <b>Tread Thickness</b>    | 4.8mm   |
| <b>Insert Type</b>        | Santoprene  |
| <b>Insert Width</b>       | 54mm  |
| <b>Insert Colours</b>     | Black, Safety Yellow, Grey, White   |
| <b>Insert Slip Rating</b> | P3 Classification   |
| <b>Code Compliance</b>    | AS1428.1-2009<br><small>Check floor finish colour for luminance contrast requirements</small>   |
| <b>Features</b>           | Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings |
| <b>Application</b>        | Recessed into tread for flush finish  |
| <b>Options</b>            | Available in black anodised aluminium   |




#### Standard Colours

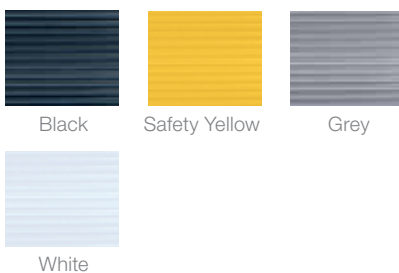

Other colours available on request

#### Typical Installation Method

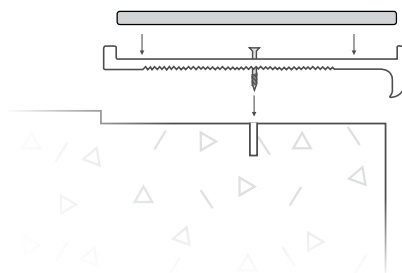

#### Stepmaster Stairnosings

##### “Defines the lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.