


PRODUCT DATA SHEET

Stepmaster 100 Series Carpet Tile Profile


Model No. SMN116

Specifications

Base Material	Alloy: 6060, Temper: T5
Finish	Clear Anodised – 25Um
Tread Width	75mm
Front Depth	35mm
Tread Thickness	4.8mm
Insert Type	Solid Epoxy Based Carborundum – Heavy Duty, External Grade
Insert Width	54mm
Insert Colours	Black, Safety Yellow, Grey, Red, Luminescent – other colours on request.
Insert Slip Rating	P5 Classification (Highest available)
Code Compliance	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
Features	Profile installed prior to carpet tiles. Holds carpet tiles on tread and riser. Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings.
Options	Available in black anodised aluminium

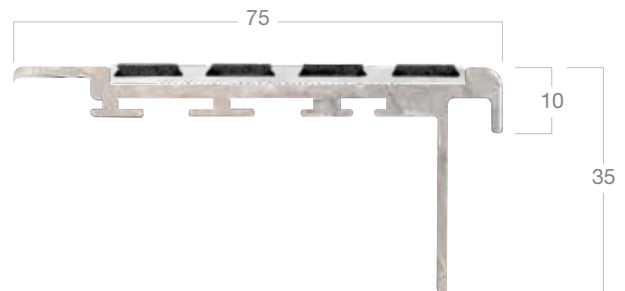


Standard Colours

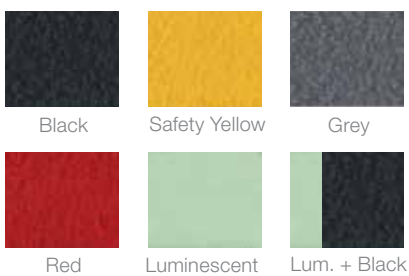

Other colours available on request

Typical Installation Method

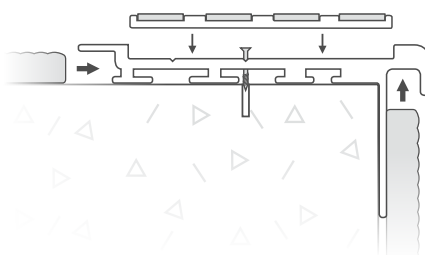

Stepmaster Stairnosings

“Defines the lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.


PRODUCT DATA SHEET

Stepmaster 200 Series Carpet Tile Profile


Model No. SMN216

Specifications

Base Material	Alloy: 6060, Temper: T5
Finish	Clear Anodised – 25Um
Tread Width	75mm
Front Depth	35mm
Tread Thickness	4.8mm
Insert Type	Solid Epoxy Based Carborundum – Heavy Duty, External Grade
Insert Width	54mm
Insert Colours	Black, Safety Yellow, Grey, Red, Luminescent – other colours on request.
Insert Slip Rating	P5 Classification (Highest available)
Code Compliance	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
Features	Profile installed prior to carpet tiles. Holds carpet tiles on tread and riser. Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings.
Options	Available in black anodised aluminium

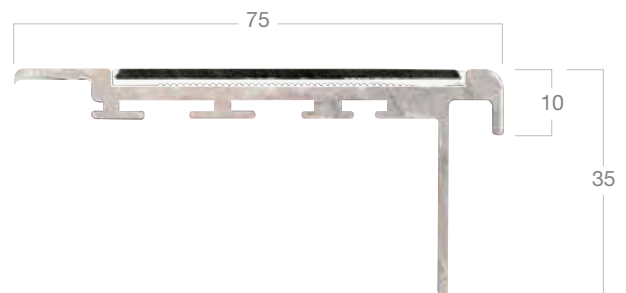


Standard Colours

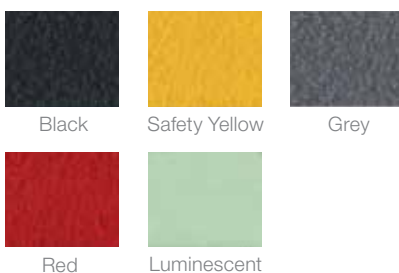

Other colours available on request

Typical Installation Method

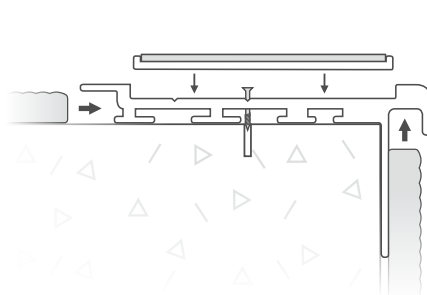

Stepmaster Stairnosings

“Defines the lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.


PRODUCT DATA SHEET

Stepmaster 300 Series Carpet Tile Profile


Model No. SMN316

Specifications

Base Material	Alloy: 6060, Temper: T5
Finish	Clear Anodised – 25Um
Tread Width	75mm
Front Depth	35mm
Tread Thickness	4.8mm
Insert Type	Santoprene
Insert Width	54mm
Insert Colours	Black, Safety Yellow, Grey, White – other colours on request.
Insert Slip Rating	P3 Classification
Code Compliance	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
Features	Profile installed prior to carpet tiles. Holds carpet tiles on tread and riser. Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings.
Options	Available in black anodised aluminium

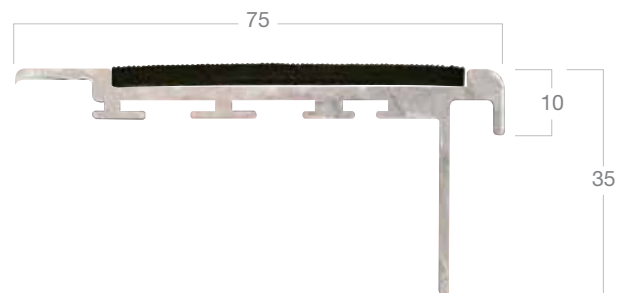


Standard Colours

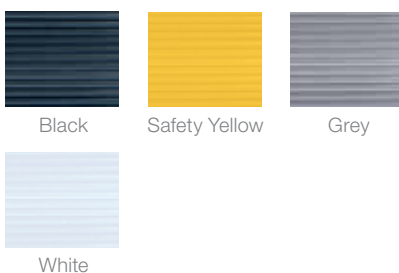

Other colours available on request

Typical Installation Method

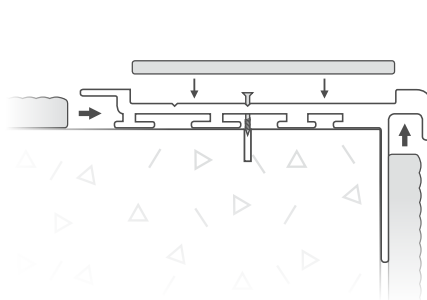

Stepmaster Stairnosings

“Defines the lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.


PRODUCT DATA SHEET

Stepmaster 400 Series Carpet Tile Profile

Model No. SMN416

Specifications

Base Material	Alloy: 6060, Temper: T5
Finish	Clear Anodised – 25Um
Tread Width	75mm
Front Depth	35mm
Tread Thickness	4.8mm
Insert Type	Carborundum tape – Heavy Duty, External Grade
Insert Width	54mm
Insert Colours	Black, Safety Yellow, Grey, White – other colours on request.
Insert Slip Rating	P5 Classification (Highest available)
Code Compliance	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
Features	Profile installed prior to carpet tiles. Holds carpet tiles on tread and riser. Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings.
Options	Available in black anodised aluminium

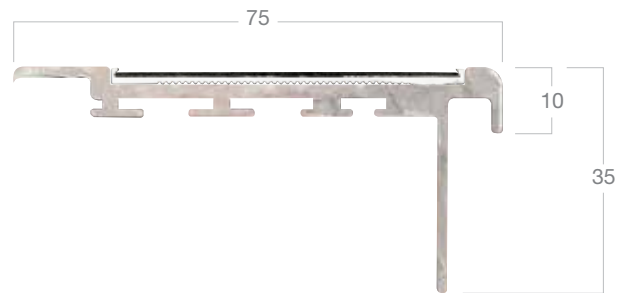

Standard Colours



Black




Grey



Yellow

Typical Installation Method

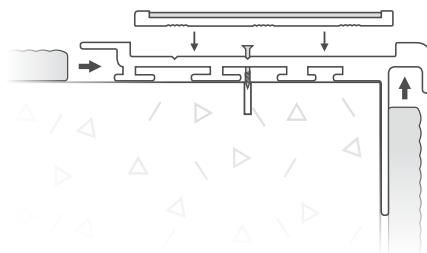

Stepmaster Stairnosings

“Defines the lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.