



STEP MASTER
STAIRNOSINGS & FLOOR TRIMS

CONTENTS

- 3** Stepmaster Range & Installation
'DEFINES THE LINES'
- 4** Stepmaster 100 Series
ABRASIVE 4 BAR INSERT
- 5** Stepmaster 200 Series
ABRASIVE FULL BAR INSERT
- 6** Stepmaster 300 Series
MULTIPURPOSE SANTOPRENE INSERT
- 7** Stepmaster 400 Series
CABORUNDUM TAPE INSERT
- 8** Stepmaster 500 Series
ABRASIVE TREAD INSERTS
- 9** Industrial Nosing, Stairtile, Tapes
HEAVY DUTY APPLICATIONS
- 10** Stepmaster 600 Series
ALUMINIUM TRANSITION TRIMS

STEP MASTER NOSINGS

"DEFINES THE LINE"

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements.


Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.

Design features include:

- Unique installation method, with hidden fixings
- Clear or Black anodised finish
- Non-toxic abrasive insert
- Wide range of colours and profiles
- Install onto various substrates and finishes





Usage includes:

- Railway Stations / Airports
- Hospitals & Health Care
- Education Facilities
- Shopping Plazas
- Public Domains

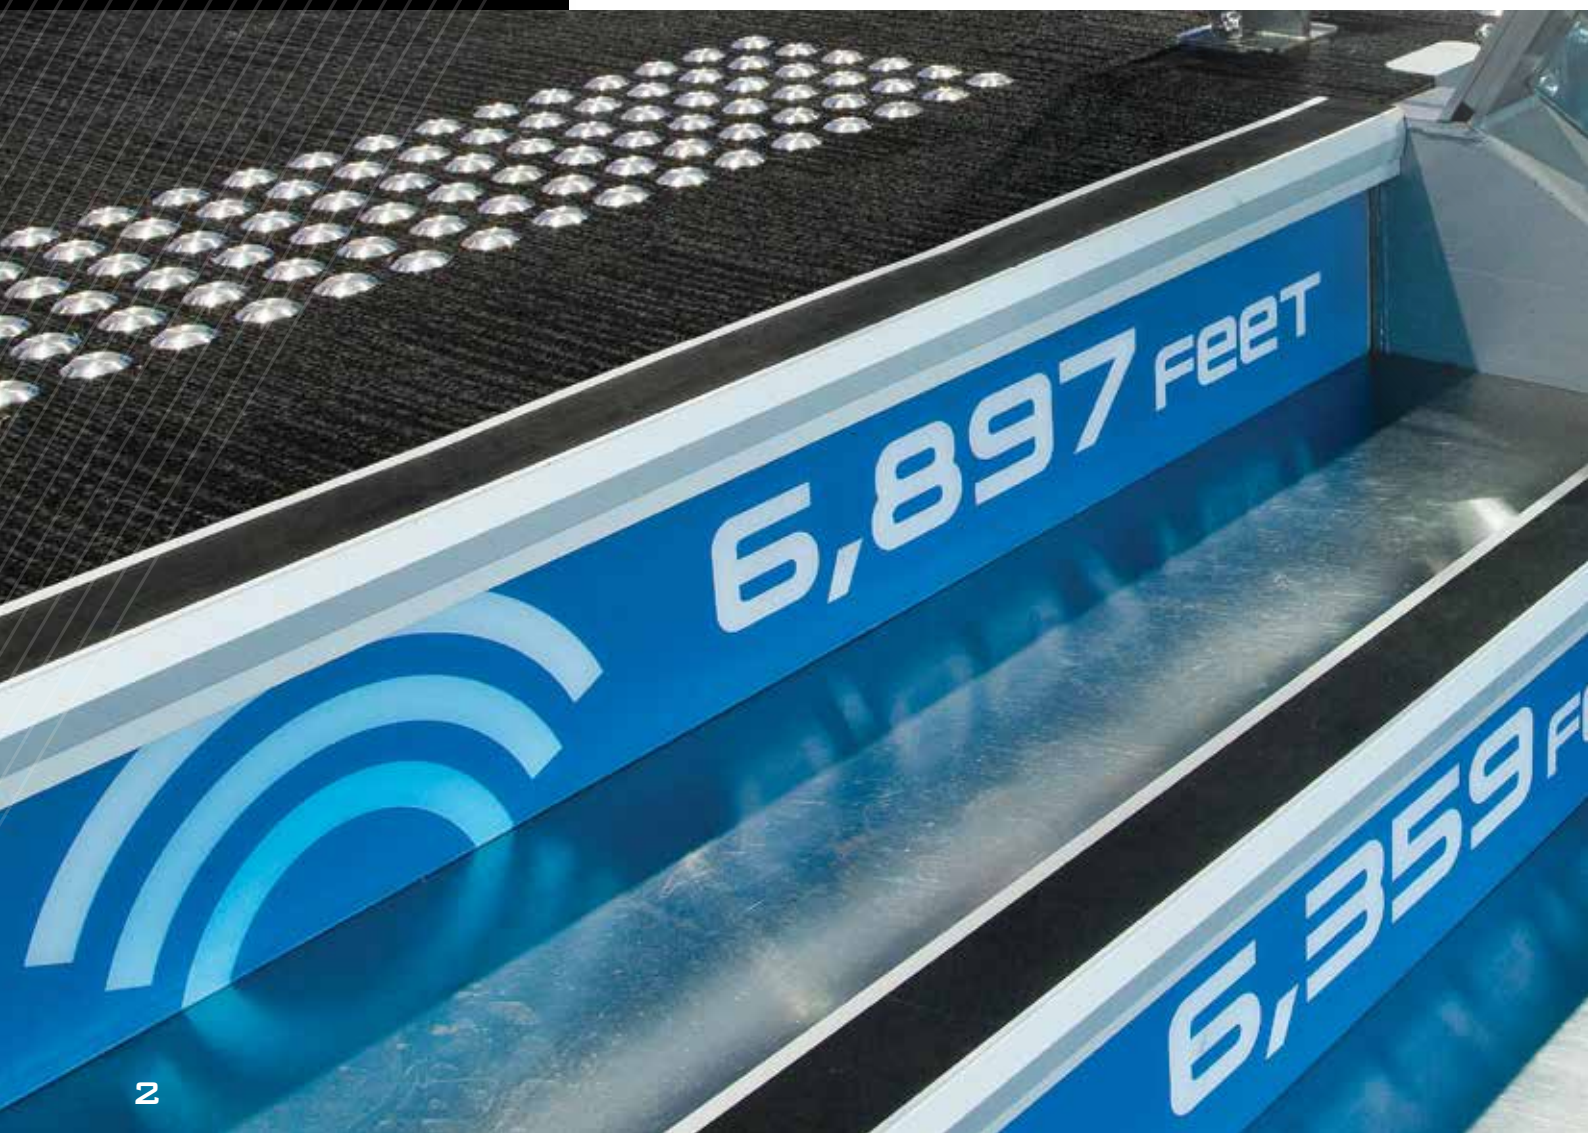

TYPICAL INSTALLATION METHODS

Stair Nosing and Insert profiles should be selected to match the type of floor covering and step design.

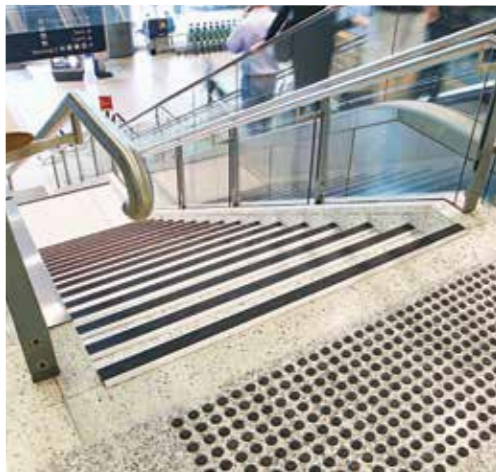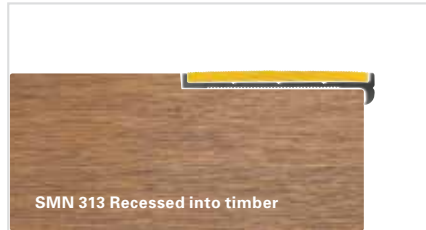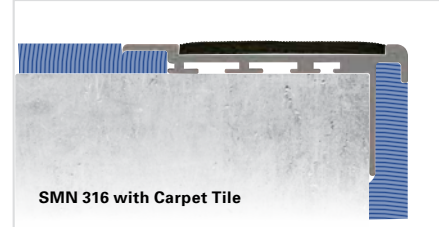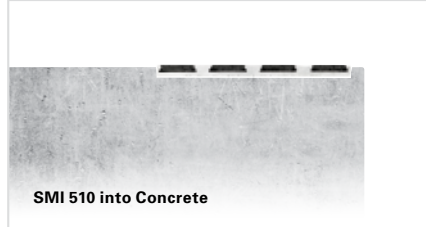

STEP MASTER 100 SERIES EPOXY CARBORUNDUM 4 BAR INSERT

Specifications

PRODUCT	Step Master – 100 Series
CODE	SMN 100
PROFILE	Anodised Aluminium - Clear or Black Finish
ALLOY	T5/ 6060
INSERT	Non Slip Abrasive, VII Rating
COLOURS	6 Standard - Black, Grey, Yellow, White, Red & Luminescent
LENGTH	Up to 6100mm
WEIGHT	110 - 950gs/m 113 - 660gs/m 111 - 920gs/m 114 - 950gs/m 112 - 730gs/m 115 - 1001gs/m
APPLICATION	Heavy Duty Internal and External Installations
USAGE	Railway Stations, Airports, Educational Institutes, Health Care, Shopping Plazas, Carparks and Public Domains.

Standard Colours

Other colours available on request



BLACK 122



WHITE



GREY 123



RED 128



YELLOW 129





BLACK / LUMINESCENT 122/7




LUMINESCENT 127


Typical Installation Method

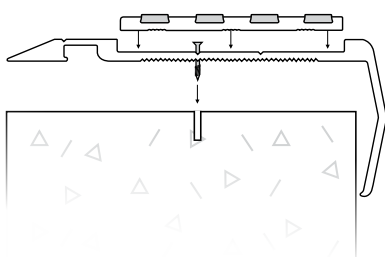


4 Bar Carb Insert
SMN 112




4 Bar Carb Insert
SMN 113




4 Bar Carb Insert
SMN 110

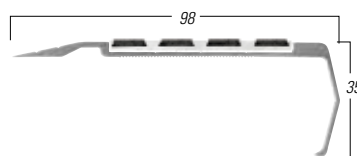


4 Bar Carb Insert
SMN 115



Full Bar Insert
SMN 116



4 Bar Carb Insert
SMN 111



4 Bar Carb Insert
SMN 114


4 Bar Carb Insert
Black Anodised
Available in all Profiles

STEP MASTER 200 SERIES


EPOXY CARBORUNDUM FULL BAR INSERT

Specifications


PRODUCT	Step Master – 200 Series
CODE	SMN 200
PROFILE	Anodised Aluminium - Clear or Black Finish
ALLOY	T5/ 6060
INSERT	Non Slip Abrasive, VII Rating
COLOURS	6 Standard - Black, Grey, Yellow, White, Red & Luminescent
LENGTH	Up to 6100mm
WEIGHT	210 - 800gs/m 213 - 610gs/m 211 - 880gs/m 214 - 900gs/m 212 - 680gs/m 215 - 960gs/m
APPLICATION	Heavy Duty Internal and External Installations
USAGE	Railway Stations, Airports, Educational Institutes, Health Care, Shopping Plazas, Car parks and Public Domains.




Full Bar Insert
SMN 212




Full Bar Insert
SMN 213




Full Bar Insert
SMN 210

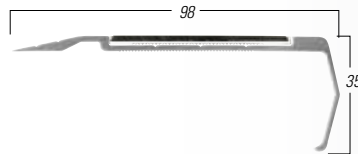


Full Bar Insert
SMN 215



Full Bar Insert
SMN 216



Full Bar Insert
SMN 211



Full Bar Insert
SMN 214

Full Bar Insert
Black Anodised
Available in all Profiles

Standard Colours

Other colours available on request



BLACK 122



WHITE



GREY 123



RED 128




YELLOW 129



LUMINESCENT 127

Typical Installation Method

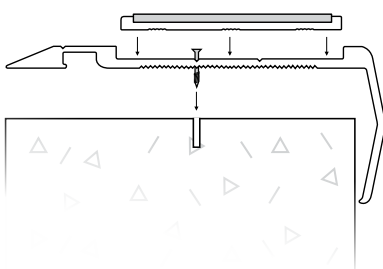

STEP MASTER 300 SERIES SANTOPRENE INSERT

Specifications

PRODUCT	Step Master – 300 Series
CODE	SMN 300
PROFILE	Anodised Aluminium - Clear or Black Finish
ALLOY	T5/ 6060
INSERT	Thermoplastic Santoprene Ribbed - Non Slip
COLOURS	4 Standard - Black, Grey, Yellow and White
LENGTH	Up to 6100mm
WEIGHT	310 - 820gs/m 313 - 530gs/m 311 - 790gs/m 314 - 820gs/m 312 - 680gs/m 315 - 880gs/m
APPLICATION	Internal and External Installations
USAGE	Airports, Educational Institutes, Health Care, Shopping Plazas and Public Domains.

Standard Colours


Other colours available on request



BLACK



YELLOW




WHITE




GREY


Typical Installation Method

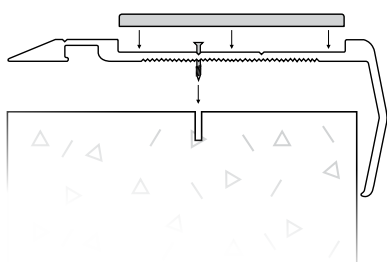


Santoprene Insert
SMN 312




Santoprene Insert
SMN 313




Santoprene Insert
SMN 310

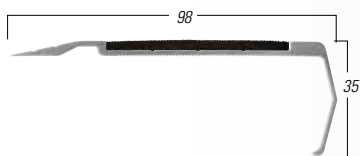


Santoprene Insert
SMN 315



Full Bar Insert
SMN 316



Santoprene Insert
SMN 311




Santoprene Insert
SMN 314

Santoprene Insert
Black Anodised
Available in all Profiles


STEP MASTER 400 SERIES CARBORUNDUM TAPE INSERT

Specifications


PRODUCT	Step Master – 400 Series
CODE	SMN 400
PROFILE	Anodised Aluminium - Clear or Black Finish
ALLOY	T5/ 600
INSERT	Non Slip Abrasive Tape
COLOURS	3 Standard - Black, Grey, Yellow
LENGTH	Up to 6100mm
APPLICATION	Heavy Duty Internal and External Installations
USAGE	Railway Stations, Airports, Educational Institutes, Health Care, Shopping Plazas, Carparks and Public Domains.




Full Bar Insert
SMN 412




Full Bar Insert
SMN 413




Full Bar Insert
SMN 410

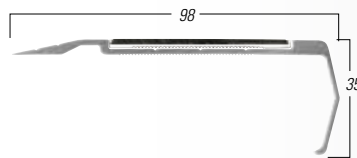


Full Bar Insert
SMN 415



Full Bar Insert
SMN 416



Full Bar Insert
SMN 411



Full Bar Insert
SMN 414

Standard Colours

Other colours available on request



BLACK 122




YELLOW 129



GREY 123

Typical Installation Method

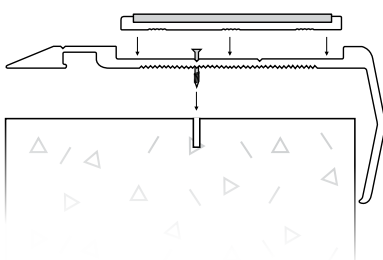

Full Bar Insert
Black Anodised
Available in all Profiles

STEP MASTER 500 SERIES

EPOXY CARBORUNDUM TREAD INSERTS

Step Master Tread Inserts can be rebated into substrate, concrete, timber, stone or surface mounted.


Specifications

PRODUCT	Step Master – 500 Series
CODE	SMI 500
PROFILE	Anodised Aluminium - Clear or Black Finish
ALLOY	T5/ 6060
INSERT	Non Slip Abrasive VII Rating
COLOURS	6 Standard - Black, Grey, Yellow, White, Red & Luminescent

LENGTH	Up to 6100mm
WEIGHT	510 - 230gs/m 511 - 190gs/m 512 - 178gs/m
APPLICATION	Heavy Duty Internal and External Installations
USAGE	Railway Stations, Airports, Educational Institutes, Health Care, Shopping Plazas, Carparks and Public Domains.



FULL BAR



Black
SMI 511

Yellow
SMI 511

Grey
SMI 511


White
SMI 511

Red
SMI 511

Luminescent
SMI 511

Black Anodised Luminescent
SMI 511

4 BAR



Black
SMI 510

Yellow
SMI 510

Grey
SMI 510

White
SMI 510

Black & Luminescent Combination
SMI 510

Luminescent
SMI 510

Black Anodised Luminescent
SMI 510

SINGLE BAR



Black
SMI 512

Yellow
SMI 512

Grey
SMI 512

White
SMI 512

Red
SMI 512

Luminescent
SMI 512


Black Anodised Luminescent
SMI 512



INDUSTRIAL NOSING

Step Master Industrial Stair Nosing, manufactured from highly visible Yellow Fiberglass resin. Installed in Construction Stairwells; including Factory Walkways, Mining and Industrial Applications.


PRODUCT	Industrial Nosing
CODE	WIN825
COLOURS	Yellow.
LENGTHS	4.0m
WEIGHT	825 - 680gs/m
PROFILE SIZE	80 x 25mm
MATERIAL	Reinforced Fiberglass, Non-Slip Nosing, Epoxy Based Carborundum Coating
USAGE	Suitable for Heavy Duty external / internal installations. Industrial Mining Plant Civil Works

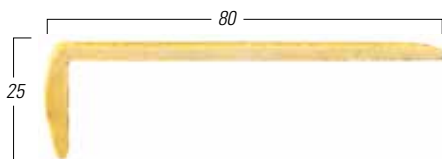

STAIRTILE

Stairtile is a durable slip resistant rubber based material designed for use as an insert and or protective edging suitable for use with stone, ceramic tiles, terrazzo, cement and timber treads.

PRODUCT	Stairtile
CODE	OT25F & OT51R
SLIP RESISTANCE	High co-efficient of friction wet or dry
SUPERIOR SAFETY	Defines step edges & no sharp edges.
COLOURS	Black, Brown & White.
LENGTHS	OT51R Standard lengths; 2134, 1830, 1520 & 1219mm OT25F Standard lengths; 2134mm
WEIGHT	OT25F - 310gs/m OT51R - 620gs/m
PROFILE SIZE	OT51R 25 x 6.5mm OT25F 51 x 6.5mm
APPLICATION	Interior/exterior installations.

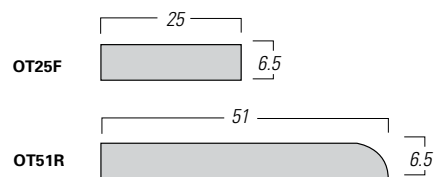

800 SERIES ABRASIVE TAPES

Specifications

- Heavy Duty
- Self Adhesive High Bond
- 50mm wide
- 18m Roll length

Colours

- SMTB Black
- SMTY Yellow
- SMTG Grey
- SMTBY Black/Yellow Hazard

Other colours available on request




STEP MASTER 600 SERIES


ALUMINIUM TRANSITION TRIMS FLOOR PROFILES

Specifications

- Material: Clear anodized finish (other colours available on request)
- Length: 3600mm (Hole spacings @ 260mm centres)
- Usage: Internal / External for commercial installations, residential, public spaces
- Installation: Adhesive or screw fixed methods

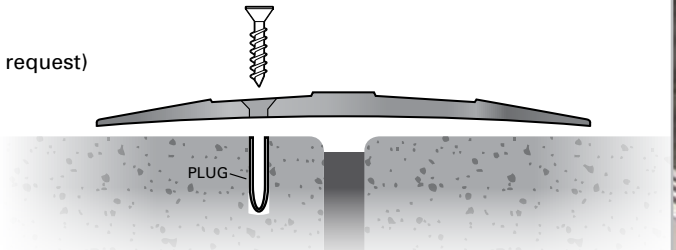

Cover Trim




SMT50
Adhesive Fixed



SMT50WH
Screw Fixed



SMT50AI
Anti-slip Insert




SMT75
Adhesive Fixed



SMT75WH
Screw Fixed



SMT75AI
Anti-slip Insert




SMT100
Adhesive Fixed



SMT100WH
Screw Fixed



SMT100AI
Anti-slip Insert



SMT125
Adhesive Fixed




SMT125WH
Screw Fixed




SMT125AI
Anti-slip Insert

SMEJ110 - Adhesive Fixed
SMEJ110WH - With Holes
Screw Fixed




Reducing Trim


SMFT45 - reducing trim for
carpets/vinyl 45mm




SMFT60 - reducing trim for
carpets/vinyl 60mm




SMFT80 - reducing trim for
carpets/vinyl 80mm



SMFT100 - reducing trim for
carpets/vinyl 100mm

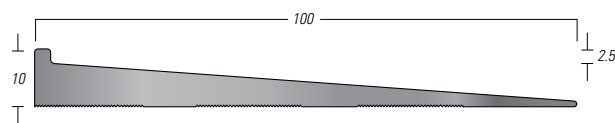


SMOST55 - offset floor trim for
2 unequal surfaces/floor heights.
Variance of 5mm - 15mm




Finishing Trim


SMFT25 - finishing trim for stairs
and landings

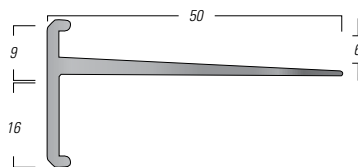

SMFT9 - finishing trim for carpet



SMFT9C - curvable convex/concave



Baggage Claim →
Rental Cars →
Taxis →
Trains →
Terminal 2 →



Tacguide Architectural Products Pty Ltd.
ABN 82 101 415 460

P 1300 914 552
E sales@tacguide.com.au
W www.tacguide.com.au