



## Product Data Sheet

# STEPMASTER STAIRNOSINGS

## STEPMASTER 900 SERIES

Stepmaster offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Stepmaster Stair Nosings are manufactured to meet and exceed the Australian standards and building codes.

### SPECIFICATIONS

PRODUCT	<b>Stepmaster 900 Series</b>
CODE	<b>SMN910</b>
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	85mm
FRONT DEPTH	35mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Anodised Alloy: 6060, Temper: T5
PRODUCT WARRANTY	2 Years (As per TacGuide's standard warranty conditions)
INSERT SLIP RATING	P5 Classification (Highest available)
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
FIXING METHOD	Screw fixed - Adhesive optional
APPLICATION	Surface mounted on hard floor finishes – Concrete, Timber etc.

### \*STANDARD COLOURS

#### Aluminium



CLEAR ANODISED



BLACK ANODISED



GOLD ANODISED

#### Insert



CLEAR ANODISED



BLACK ANODISED




GOLD ANODISED

\*Other colours available on request



### PROFILE

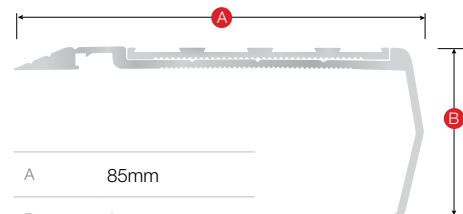


A 85mm

B 35mm

\* Insert measures 54mm wide

### TYPICAL INSTALLATION

Screw fixed - Adhesive optional

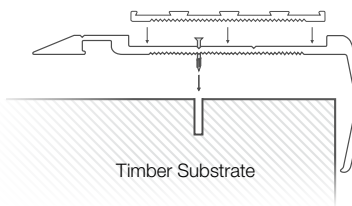

Timber Substrate

### HOW TO SPECIFY

Copy the prewritten specification below and update all sections in brackets to create your project specification.

#### Description

Stepmaster stairnosings profile series 900, Code: SMN910 in (Clear/Black/Sovereign Gold) anodised finish aluminium with insert colour (Clear/Black/Sovereign Gold). To be installed to the manufacturer's instructions in accordance to the AS/NZS 1428.1.4.2009

#### Manufacturer

TacGuide Architectural Solutions  
P: 1300 914 552  
E: sales@tacguide.com.au  
W: www.tacguide.com.au

#### Example – Typical Specification

Stepmaster stairnosings profile 900 series, SMN910 in clear anodised aluminium finish, with insert colour clear anodised. To be installed in accordance to the manufacturer's instructions in accordance to the AS/NZS 1428.1.4.2009